




ZUMALIGHTING
QUALITY OUTDOOR SOLUTIONS

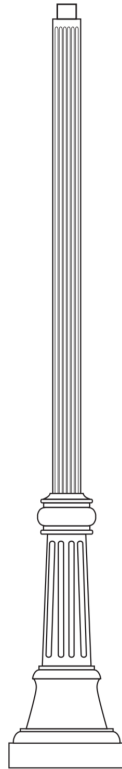

MODEL
DUBLIN

TYPE
ALUMINUM POLE

SERIES
POLES/ARMS/BASES


ZUMA LIGHTING LLC
325 N LARCHMONT BLVD STE 406, LOS ANGELES, CA 90004
INFO@ZUMALIGHTING.COM • [\(310\) 975-3126](tel:(310)975-3126) • ZUMALIGHTING.COM

ORDERING INFORMATION

Model DUBLIN

Type ALUMINUM POLE

Series POLES/ARMS/BASES

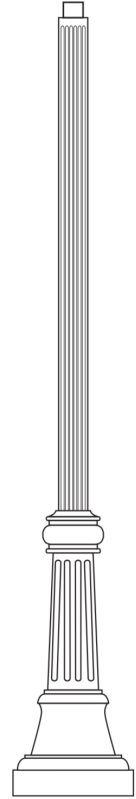

Pole	Pole Height	Diameter	Shaft	Color	Options
DUB = Dublin	25 = 25' Max (specify any height up to 18')	5 = 5" dia.	F = Fluted NF = Non-Fluted	DB = Dark Bronze BK = Black WH = White SL = Silver CC = Custom	DR = Duplex Receptacle GFI = Ground Fault Interrupter

POLE SPECIFICATIONS

Pole Construction

Durable corrosion resistant cast aluminum base with hand hole and cover. The pole is 5" dia. X 3/16" wall thickness. Extruded 6063-T6 aluminum alloy

Pole Height

Specify any height up to 25'.

Shaft

Specify fluted or non-fluted.

Color

Polyester powder fuse coating:

PP – Primed Painted

BK – Black Paint

BZ – Bronze Paint

GN – Green Paint

VG – Verde Green

CC – Custom Color, consult factory

Anchor Bolts

(4) 3/4" x 24" x 3", fabricated from hot rolled steel, hot dip galvanized

