



ZUMALIGHTING
QUALITY OUTDOOR SOLUTIONS



MODEL
SAGITTARIUS

TYPE
LED

SERIES
ARCHITECTURAL

ZUMA LIGHTING LLC
325 N LARCHMONT BLVD STE 406, LOS ANGELES, CA 90004
INFO@ZUMALIGHTING.COM • (310) 975-3126 • ZUMALIGHTING.COM

ORDERING INFORMATION

Model SAGITTARIUS
Type LED
Series ARCHITECTURAL



FIXTURE	WATTAGE	VOLTS	COLOR TEMP	OPTICS	SHADE SIZE	MOUNT	COLOR	OPTIONS
SAG = Sagittarius	16W 23W 34W 50W 60W 80W 100W 120W 150W 180W Other _____*	U = 120v-277v CV = Custom Voltage	27K = 2700K 3K = 3000K 35K = 3500K 4K = 4000K 5K = 5000K	T2 = Type II T3 = Type III T4 = Type IV T5 = Type	20 = 20" dia. 24 = 24" dia. 30 = 30" dia.	SF238 = Fits over 2-3/8"OD tenon SF300 = Fits over 3"OD tenon WM = Wall Mount*	BZ8 = Zuma Bronze BK = GT Black WH = Alpine White SL = Iridium Silver GRY = Granite Gray GRN = Moss Green CC = Custom Specify RAL	M = Motion Sensor PC = Photocell D = Dimming SP = Surge Protection HSS = Houseside Shield AGFL = Anti Glare Frosted Diffusion Lens* BAA = Buy American Act Compliant DSC = Dark Sky Compliant* <i>*Only available with select optics, contact factory for details</i>

SPECIFICATIONS

Housing

The Sagittarius fixture housing is constructed from a combination of heavy-duty cast and spun aluminum.

Electrical Components

Zuma's high-performance LEDs leverage cutting-edge technology to enhance thermal management and ensure longevity. Each fixture is equipped with 80 CRI LEDs, with options for higher or lower CRI values available upon request. Available in Type III and Type V distributions with wide choice of color temperatures from CCT(2700K - 5000K). These LEDs are designed to fit LEDIL lenses with IP67 rating.

For dynamic lighting control, 0-10V dimming capabilities are available upon request. Additional control options are outlined in the specifications above. For custom integration needs, controls can be tailored to seamlessly connect with existing management systems. For more detailed information or to discuss custom solutions, please contact our sales team.

Lens

Optional anti-glare frosted diffusion lens is fabricated from acrylic.

Mounting

Fixture can be installed on post-top.

Tenon top mounting options:

- over 3" OD (standard)
- over 2-3/8" OD

Fixture can also be installed on mounting arms, sold separately. See architectural arm .pdf for style options.


Finish

Our thermoset polyester powder coats, available in standard and custom colors, undergo rigorous preparation including sandblast treatment to ensure optimal adhesion and surface integrity. Each coating is meticulously applied to achieve a uniform thickness of 2-4 mils, then oven-baked to enhance durability and color stability. This process guarantees a superior finish that withstands the elements and maintains its aesthetic appeal over time. For specific color requirements or further details on our finishing process, please contact our customer support team.

Certificates & Warranty

- Buy American Act (BAA) Compliant*
- Build America, Buy America (BABA) Compliant*
- Dark Sky Compliant*
- Suitable for Wet Locations
- 5-Year Warranty

**Must specify at time of ordering in order to ensure product is manufactured to meet all required compliances.*

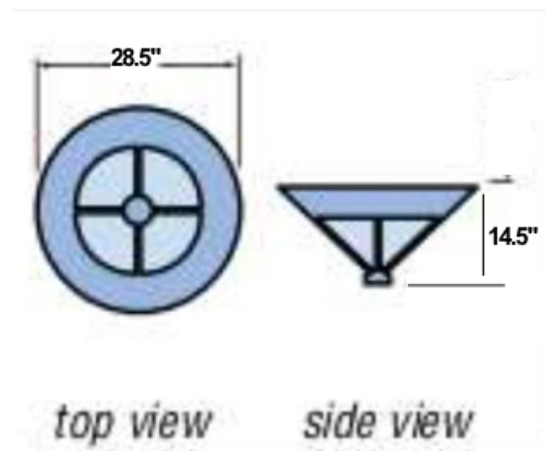

Custom size options available, contact your sales rep for more information.